

## Advantech AE Technical Sharing Documentation

Date	2017 / 02 / 23	SR#	1-2789019120
Category	<input checked="" type="checkbox"/> FAQ <input type="checkbox"/> SOP	Related OS	N/A
Abstract	How to minimize external interference between UNO-PCM-23-AE when using PC/104 PCI-104 cards		
Keyword	UNO-PCM / UNO-2174A / UNO-2178A		
Related Product	UNO-PCM / UNO-2174A / UNO-2178A		


### ■ **Problem Description:**

CN5 on UNO-PCM-23 provides either 3.3V or 5V to the PCIVIO of cards attached; kindly contact the card manufacture to check if PCIVIO is needed for the card, **if uncertain, 3.3V is recommended.**

### ■ **Brief Solution - Step by Step:**

Kindly contact the sales / PM for the connector if not included in the package.

Refer to CN5, close pin2 and pin3 for 3.3V, close pin1 and pin2 for 5V

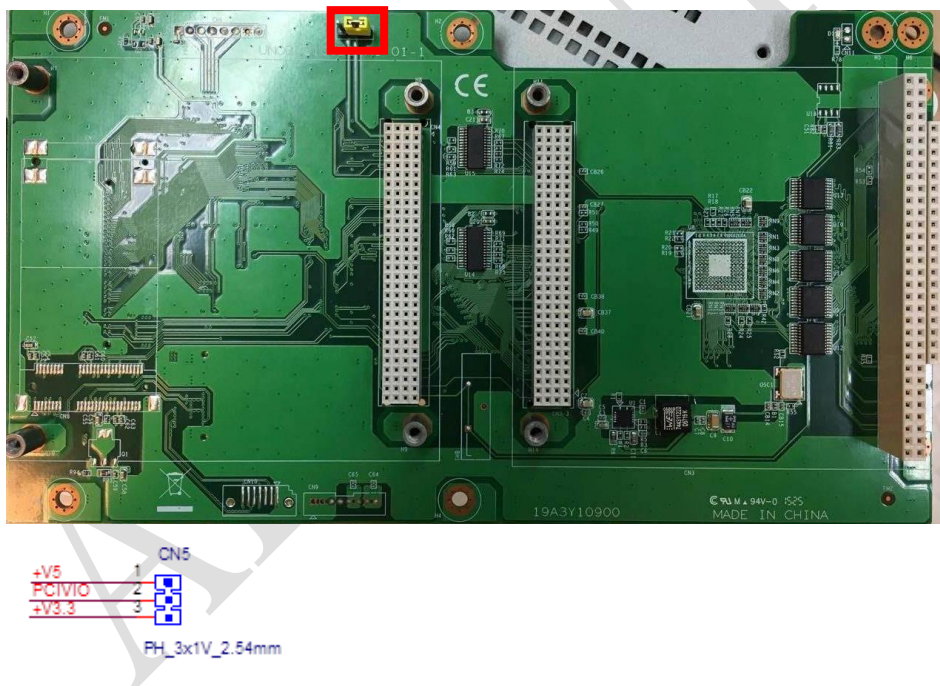

### ■ **Reference:**

N/A