

Advantech SE Technical Share Document


Date	2019 /12 / 23	Related Product	WebAccess/SCADA 8.4.3	
Category	■ FAQ □ SOP □ Driver Tech Note			
Abstract	How to use bwdb driver to get value from database			
Keyword	WebAccess/SCADA			
Related OS	Win7, Windows Server 2008 / 2012 / 2016, Win10			
Revision History				
Date	Version	Author	Reviewer	Description
2019/12/23	V1.0	Kelvin Huang	Nick Liu	

■ **Problem Description & Architecture:**


This FAQ instructs user how to how to use bwdb driver to get value from database.

■ **Brief Solution - Step by Step:**


1. Use MSAQuery open BwPdata.Mdb
2. Create myTABLE and insert values

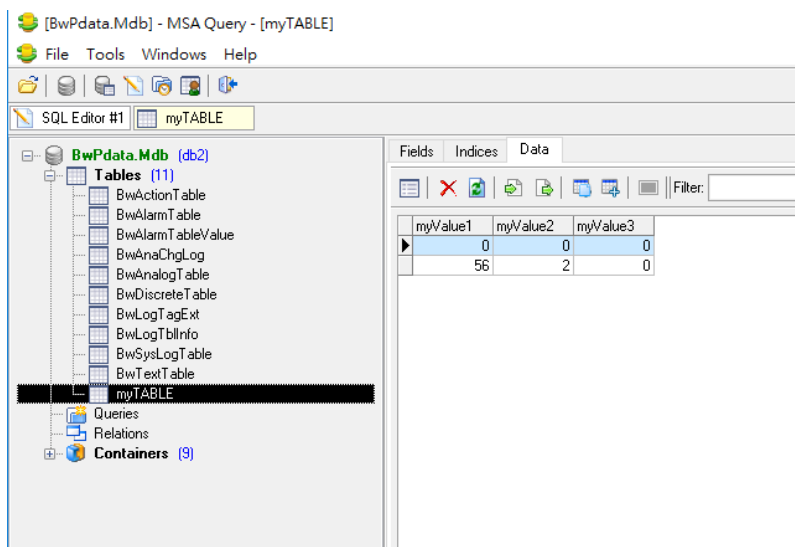


3. Check SQL script is workable

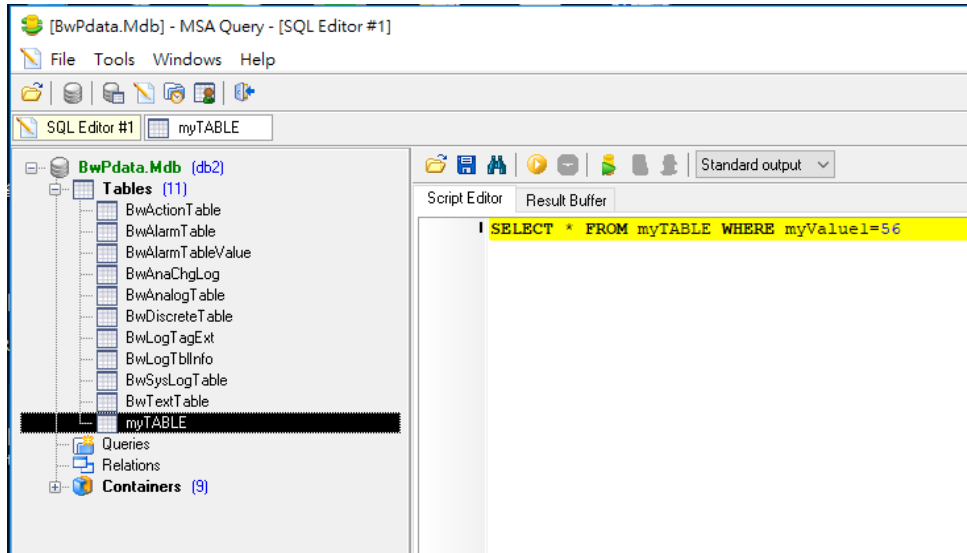


4. Check result

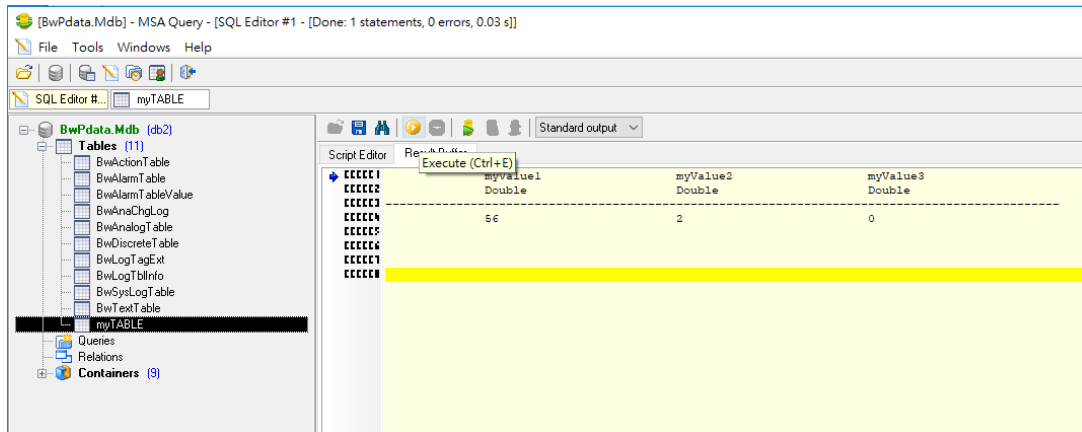


5. click C:\windows\SysWOW64\odbcad32.exe, find DSN ex: bwpdata_Access

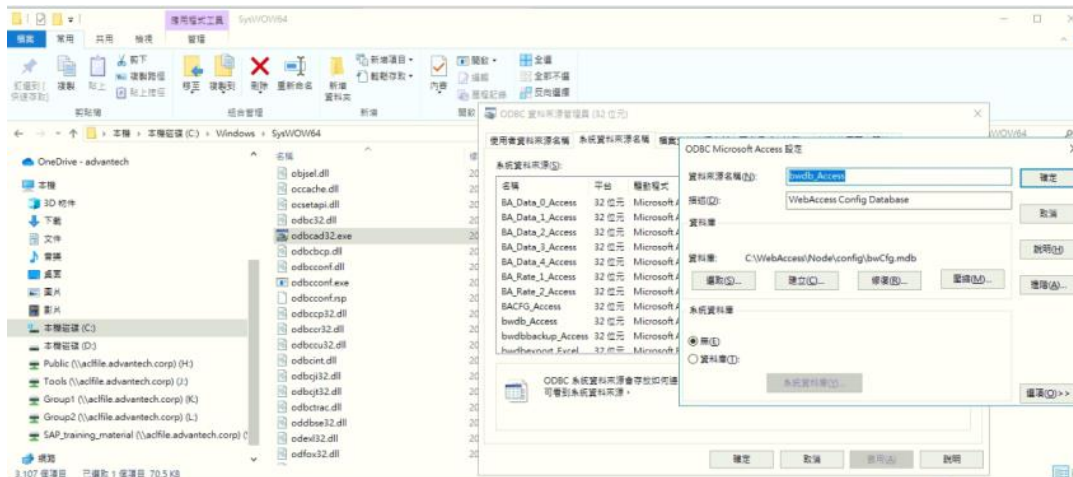


6. Create API port

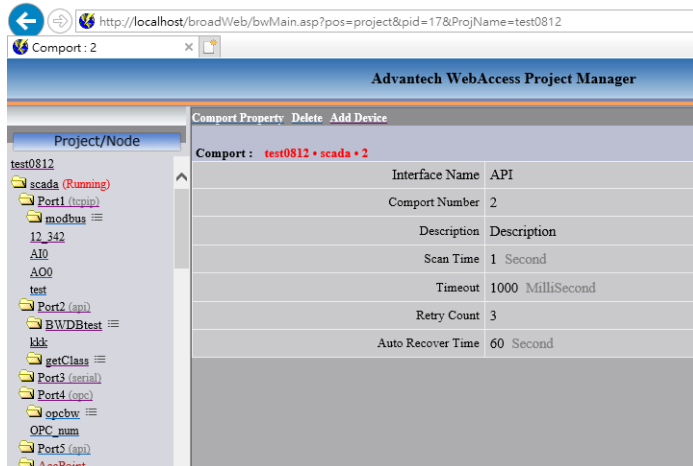


7. Add device and input the script

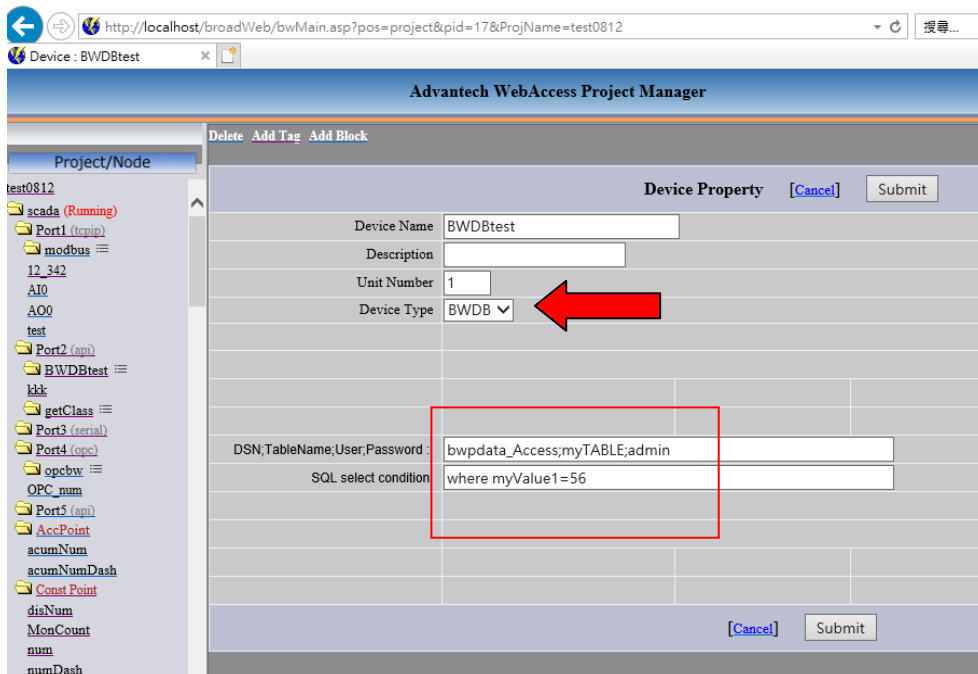

8. Add tag:KKK and address "myValue2"

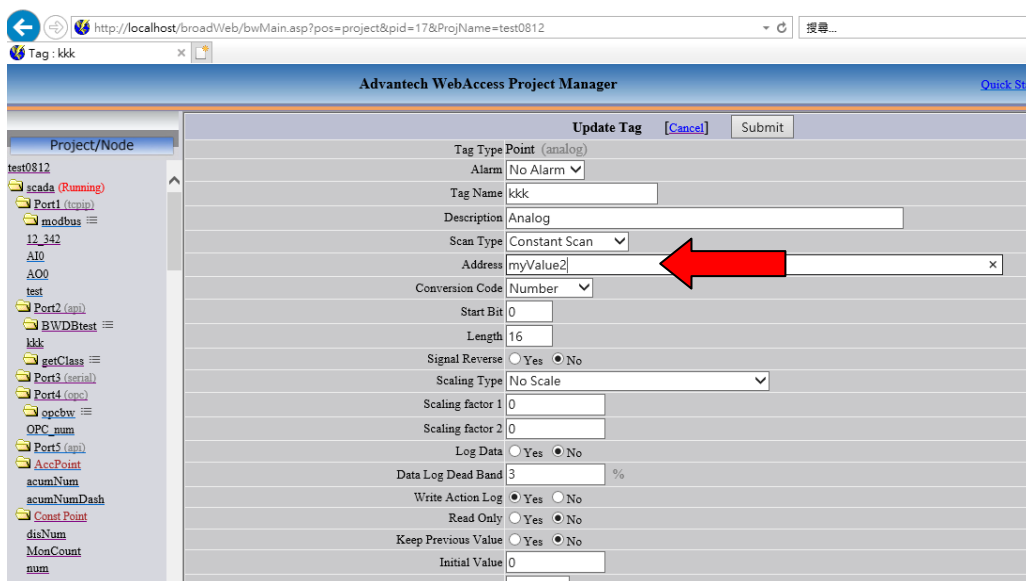

9. Then download project and see viewDAQ show kkk value is 2 which is from database

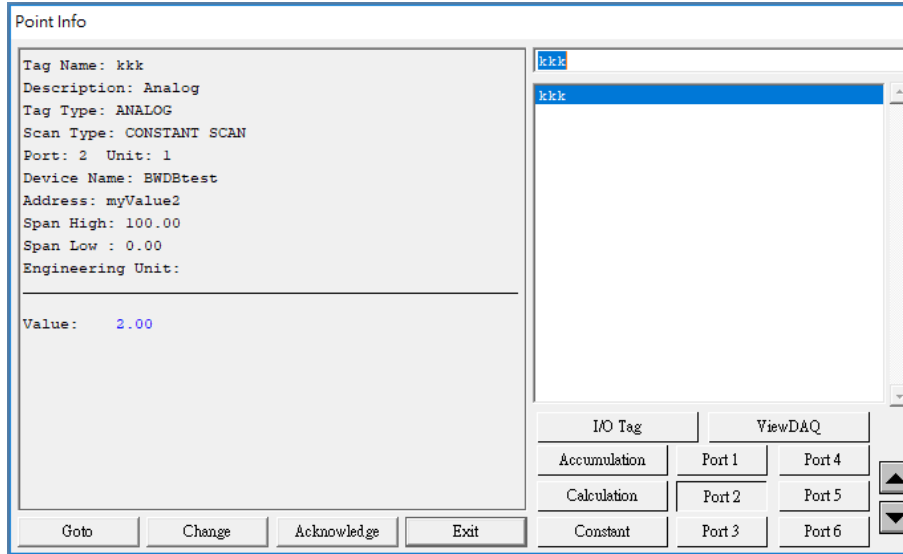

- **Pin Definition (in case of serial connection):**

- **Reference:**